



Alarm Annunciators

- Standard models available from 2 to 48 windows
- Choice of 3 window sizes and 6 different window colours
- Optically isolated fault inputs with wide fault input voltage range (12 - 240V AC/DC +/-10%)
- AC-DC Fail Annunciation
- Field selection for NO / NC fault input contacts, grouping of alarms, window size configuration
- Space saving due to lower depth of only 100mm
- Integral push buttons for Test, Acknowledge, Mute and Reset operations
- Four SPDT relay outputs (2 for grouping, 1 for external hooter, 1 for ring back sequence)
- 7 Field selectable operation sequences as per ISA standard
- Integral buzzer for audible alarm output of 90 dB
- Communication interface with RS485 Modbus RTU protocol
- Replaceable LEDs, Fast Scan, Manned / Unmanned, Supervisory Relay & Supply fail annunciation available
- CE and RoHS complied

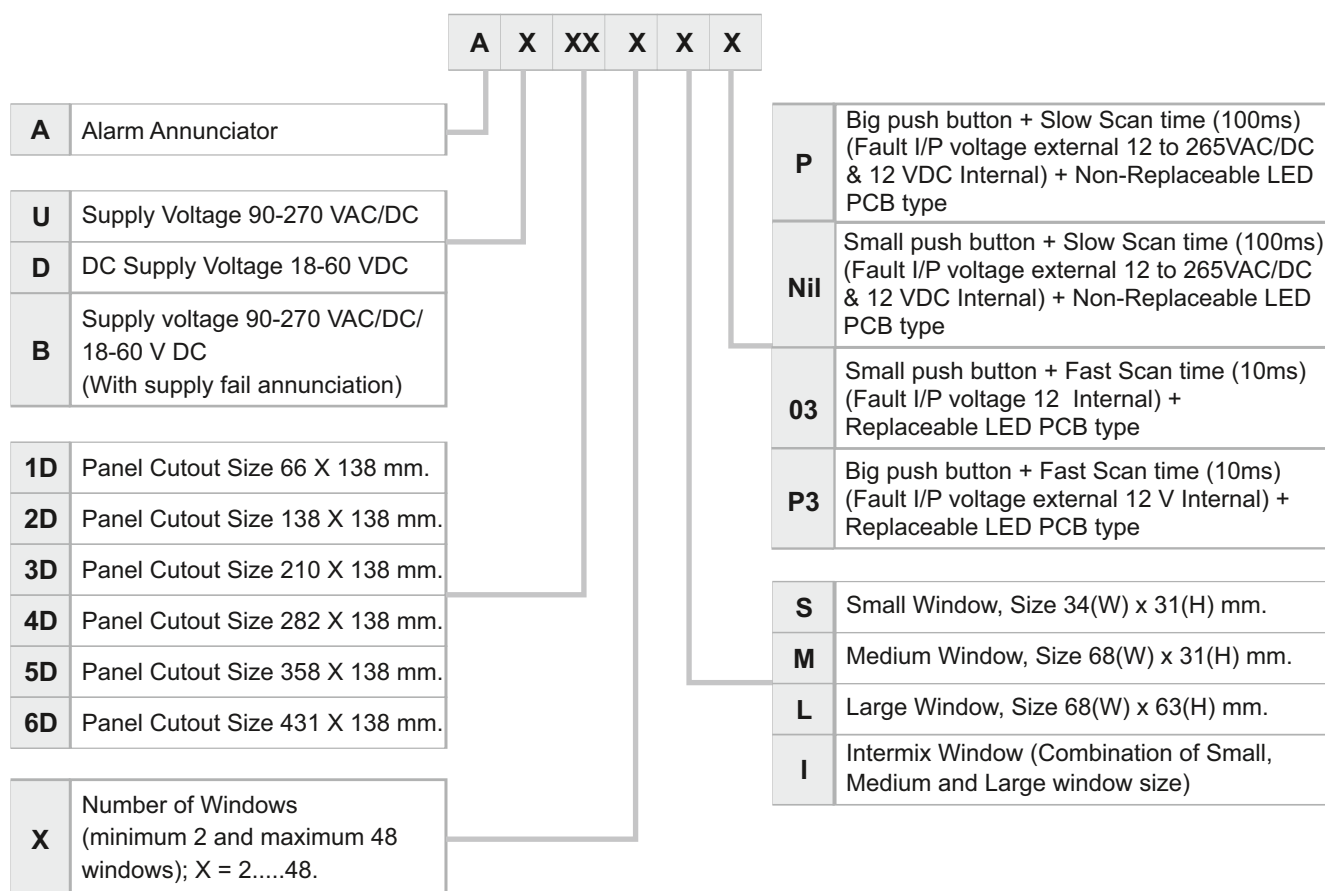

Ordering Information

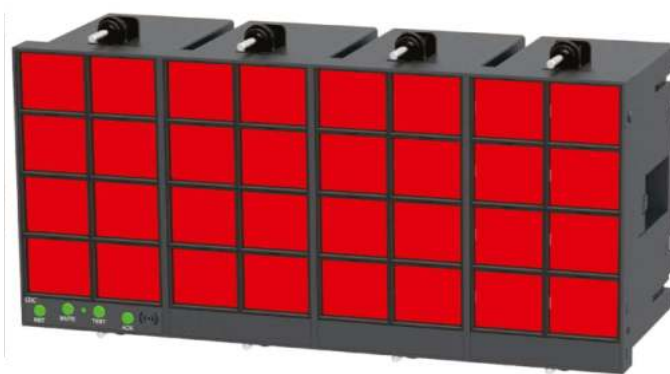

Cat. No.	Product Size	No. of Windows	Window Size	Keys
AU1D8S	1D	8	Small	Small
AU1D6SP	1D	6	Small	Big
AD1D8S	1D	8	Small	Small
AD1D6SP	1D	6	Small	Big
AB1D8S	1D	8	Small	Small
AB1D6SP	1D	6	Small	Big



AU2D16S	2D	16	Small	Small
AU2D14SP	2D	14	Small	Big
AD2D16S	2D	16	Small	Small
AD2D14SP	2D	14	Small	Big
AB2D16S	2D	16	Small	Small
AB2D14SP	2D	14	Small	Big



AU3D24S	3D	24	Small	Small
AU3D22SP	3D	22	Small	Big
AD3D24S	3D	24	Small	Small
AD3D22SP	3D	22	Small	Big
AB3D24S	3D	24	Small	Small
AB3D22SP	3D	22	Small	Big



AU4D32S	4D	32	Small	Small
AU4D30SP	4D	30	Small	Big
AD4D32S	4D	32	Small	Small
AD4D30SP	4D	30	Small	Big
AB4D32S	4D	32	Small	Small
AB4D30SP	4D	30	Small	Big